



Fogtrap® Hybrid110

# Daily Maintenance Log Book




# Daily Maintenance




## Daily maintenance guide

Maintain your Fogtrap in 4 steps.

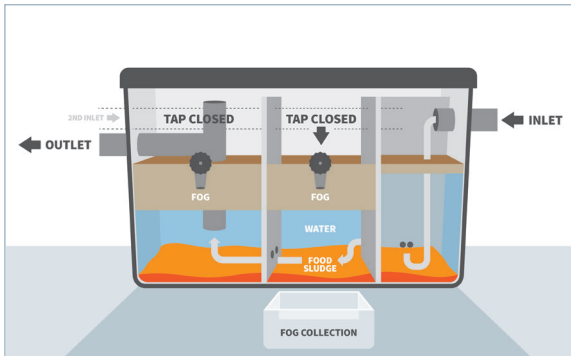


### Step 1

Place your collection container under one of the taps. Open the tap at the front by turning it anticlockwise.

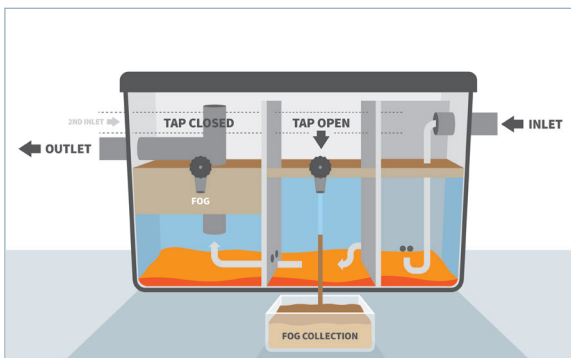

### Step 2

Drain the FOG (fat, oil and grease) into your container until the liquid becomes clear water. If tap hole becomes blocked use bristle brush provided to clear.

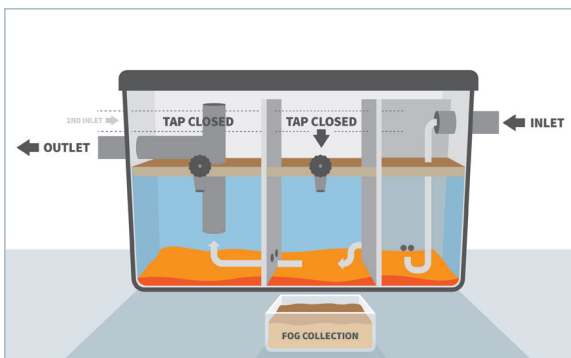

### Step 3

When water drains from the tap, stop the tap by turning it clockwise.



### Step 4

Empty your FOG container into an oil drum for collection by your designated oil contractor.

Repeat procedure for second drain off tap.

**PLEASE NOTE:** Following the Fogtrap replacement service, it may take a couple of days for the FOG to build up to the required drain off level.



