



How to drain the Fogtrap® Hybrid

Look after your grease trap by following this handy guide for your routine daily maintenance.

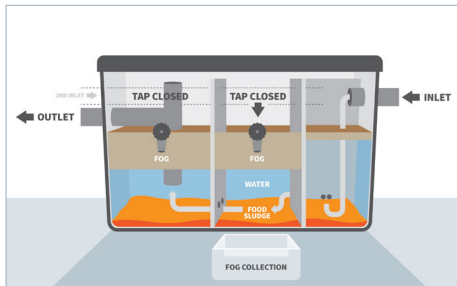


Step 1

Place your collection container under one of the taps. Open the tap at the front by turning it anticlockwise.

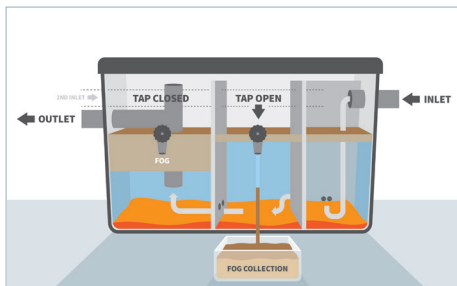

Step 2

Drain the FOG (fat, oil and grease) into your container until the liquid becomes clear water. If tap hole becomes blocked use bristle brush provided to clear.

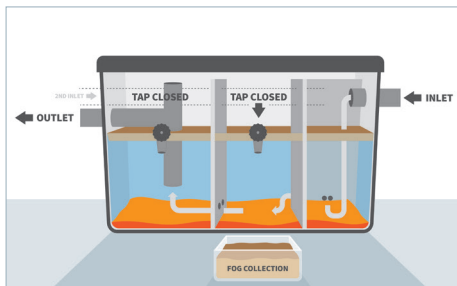

Step 3

When water drains from the tap, stop the tap by turning it clockwise.



Step 4

Empty your FOG container into an oil drum for collection by your designated oil contractor.

Repeat procedure for second drain off tap.

PLEASE NOTE: Following the Fogtrap replacement service, it may take a couple of days for the FOG to build up to the required drain off level.

Fogtrap® Service

Fogtrap® engineers will visit onsite to perform a service and replace your greasetrapp with a completely new unit to ensure that the kitchen remains in a clean and hygienic condition at all times.